



Silverline 96 side single colour



The silver line 96 is a flexible LED that is available in several different colour temperatures. It is equipped with 3M self-adhesive tape which allows itself for easy placement on almost any water and dust free surface. The silver line 96 is a side emitting LED which makes it perfect for applications that are curved.

Its flexible in its design, where each length is cut able in 63mm lengths.

A wide range of aluminium profiles and covers are available.

Features

Design flexibility
Side emitting LED

Easy installation
Adhesive tape




Technical specifications

LED	Colour temperature:	2400K / 2700K / 3000K / 4000K
	Colour rendering:	CRI > 80
	LED's per meter:	96
	Lumen output:	442 lumen (2400K) 449 lumen (2700K) 456 lumen (3000K) 463 lumen (4000K)
Power	Power:	24VDC
	Consumption per meter:	7,7W
	Maximum length:	5 meter on single ended power supply
Miscellaneous	Lifespan:	20.000 hour
	IP rating:	IP20
	Length per reel:	5 meter
	Cut length:	63mm
	Beam angle:	120°



Silverline 96 side single colour

Dimensions

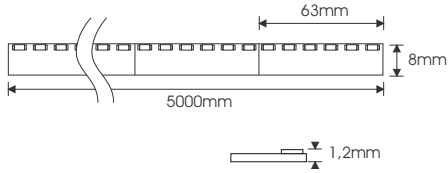

Wiring

Use min 90°C supply conductors when connecting to the silverline 96 single colour flexible LED strip.

A cable with 2 conductors is needed for the silverline 96 single colour flexible LED strip

Only use power supplies which can deliver a constant dc-voltage between 21 ~24VDC.

Order Code

- FLX.S.24.96 - Flex side led silver line 96 LED/m; 2400K; 24VDC; 7,7W/M; 500cm Reel
- FLX.S.27.96 - Flex side led silver line 96 LED/m; 2700K; 24VDC; 7,7W/M; 500cm Reel
- FLX.S.30.96 - Flex side led silver line 96 LED/m; 3000K; 24VDC; 7,7W/M; 500cm Reel
- FLX.S.40.96 - Flex side led silver line 96 LED/m; 4000K; 24VDC; 7,7W/M; 500cm Reel