




24mm Profile



Dimensions

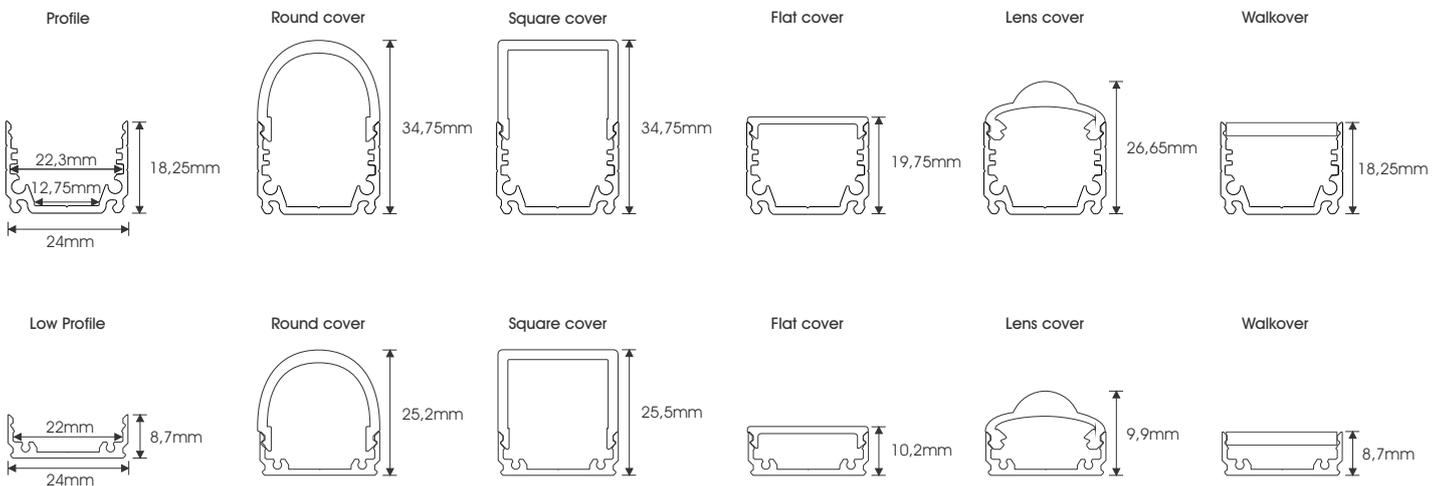

Technical specifications

Profile

Versions:	Normal / Low
Material:	Aluminium
Material finish:	Aluminium Anodised
Maximum length:	6000mm

Cover

Versions:	Round / Square / Flat / Walkover
Material:	PMMA
Material finish:	Opal / Frost
Maximum length:	3000mm

Lens

Beam angle:	20°
Material:	PMMA
Material finish:	Clear
Maximum length:	3000mm

Accessoires

End cap:	Round / Square / Flat
Mounting:	Mounting clip




Installation instruction

There are various options available to mount aluminium profile on to a surface.

See below the illustrations for three of the most commonly used mounting options.


Mounting clip

When using mounting clips place always two mounting clips for the first meter, for every extra meter place one extra.

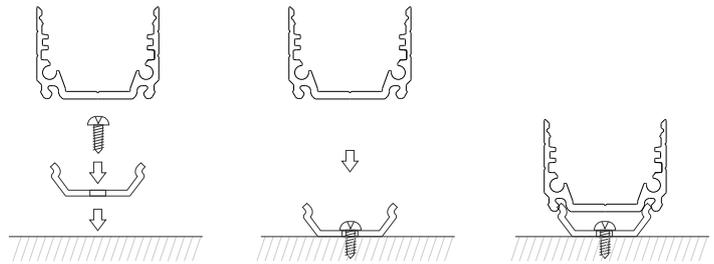

Mounting clip


Both low profile and normal profile mounting clips can be used to mount aluminium profiles to a surface. When using mounting clips always place two mounting clips for the first meter, for every extra meter place one extra.

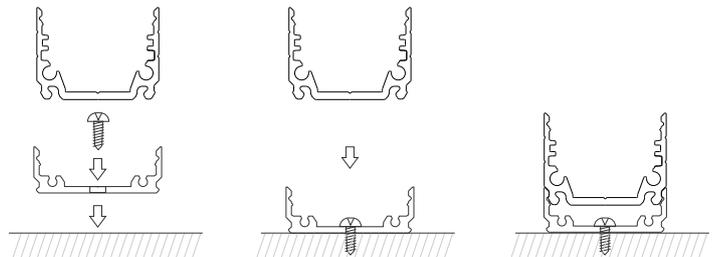

Adhesive tape

To obtain optimum adhesion make sure the surface is unified, clean and dry.

Never use this method for mounting profiles to ceiling.

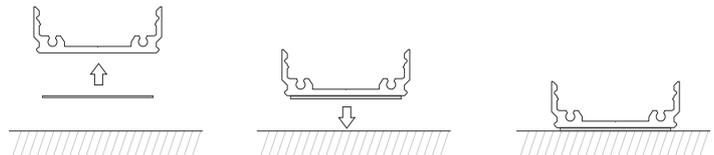

Order Code

24.ALU.MKII - 24mm aluminium profile MKII

24.STRIP - aluminium strip for 24mm profile

24.END.RO - End cap round 24mm profile

24.END.RO.C - End cap round with cable entry 24mm profile

24.END.SQ - End cap square 24mm profile

24.END.SQ.C - End cap square with cable entry 24mm profile

24.END.FL - End cap flat 24mm profile

24.END.FL.C - End cap flat with cable entry 24mm profile

24.OPA.FL

24.OPA.RO

24.OPA.SQ

24.OPA.WO

- Opal flat for 24mm profile

- Opal round for 24mm profile

- Opal square for 24mm profile

- Opal walkover for 24mm profile

24.FRO.FL

24.FRO.RO

24.FRO.SQ

- Frost flat for 24mm profile

- Frost round for 24mm profile

- Frost square for 24mm profile