



# Silverline 120 tunable white



The silverline 120 tunable white is a flexible LED that allows mood control due to the dual colour temperature LED's. It is equipped with 3M self-adhesive tape which allows itself for easy placement on almost any water and dust free surface. The silver line 120 is very suitable for cove and signage applications.

Its flexible in its design, where each length is cut able in 50mm lengths.

A wide range of aluminium profiles and covers are available.

## Features

**Tunable White**  
2400~6000K

**Easy installation**  
Adhesive tape

**Design flexibility**  
Cutable every 50mm




## Technical specifications

<b>LED</b>	Colour temperature:	2400~6000K
	Colour rendering:	CRI > 90
	LED's per meter:	120
	Lumen output:	408 lumen (2400K) 466 lumen (6000K)
<b>Power</b>	Power:	24VDC
	Consumption per meter:	19,2W
	Maximum length:	5 meter on single ended power supply
<b>Miscellaneous</b>	Lifespan:	20.000 hour
	IP rating:	IP20
	Length per reel:	5 meter ± 10mm
	Cut length:	50mm ± 1mm
	Strip width:	10mm ± 0,1mm
	Beam angle:	120°

# Silverline 120 tunable white

## Dimensions

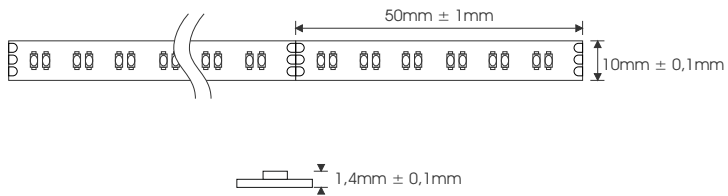

## Wiring

Use min 90°C supply conductors when connecting to the silverline 120 tunable white flexible LED strip.

A cable with 3 conductors is needed for the silverline 120 tunable white flexible LED strip

Only use power supplies which can deliver a constant dc-voltage between 21 ~24VDC.

## Order Code

FLX.S.TW.2460.120.0A - Silverline TW 2400~6000K; 120LED/m; IP20; 14,4W/m; 24V; 5 meter